


OEN 150 DATASHEET

For processes with a low proportion of emulsion mist and a medium proportion of particles

TECHNICAL DATA				
Free Airflow	188	CFM	320	m ³ /hr
Effective Airflow	30-147	CFM	50-250	m ³ /hr
Static Pressure	80.3	in/H ₂ O	20,000	PA
Voltage	100-240	V	NEMA 6-15	Plug
Intake Socket	Left or Right ~ 2, 2.5, or 3	inches	Left or Right 50, 63, or 80	mm
Collection Container	4	gallon	15	liter
Weight	122	lbs	55	kg
Size (WxD)	14x14	inches	350x350	mm
System Height	53	inches	1,340	mm

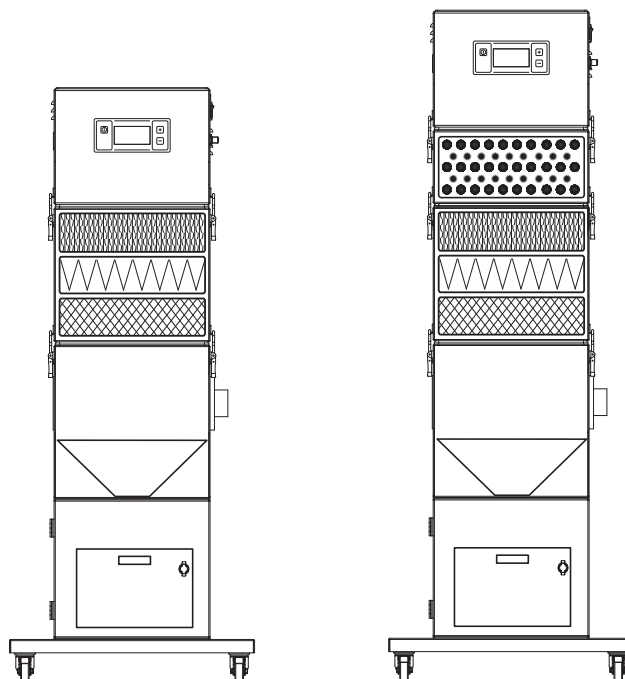

OEN 150 FILTER DATA		
Aluminum Mesh G3	Included	Washable
Z-Line Filter (M6)	Included	6.5 ft ² or 0.6 m ²
HEPA (H13)	Included	26.9 ft ² or 2.5 m ²
Activated Carbon	Optional	11 lbs or 10 liters

ORDERING DATA

SYSTEM OPTIONS	Part #
<i>OEN 150 Model (100-240V)</i>	90180
<i>Activated Carbon Filter Module</i>	11610
<i>Left Intake for OEN 150 - 50mm</i>	13159
<i>Left Intake for OEN 150 - 63mm</i>	13161
<i>Left Intake for OEN 150 - 80mm</i>	13163
<i>Right Intake for OEN 150 - 50mm</i>	13160
<i>Right Intake for OEN 150 - 63mm</i>	13162
<i>Right Intake for OEN 150 - 80mm</i>	13164

REPLACEMENT FILTERS	Part #
<i>Aluminum Grid Filter (Washable)</i>	13589
<i>Z-Line Filter (F6)</i>	11209
<i>HEPA (H13) Particle Filter</i>	13755
<i>Activated Carbon 10 Liters</i>	13021



ACCESSORIES



Easy disposal of liquids with pull out chamber

