


TFS 220 PLUS

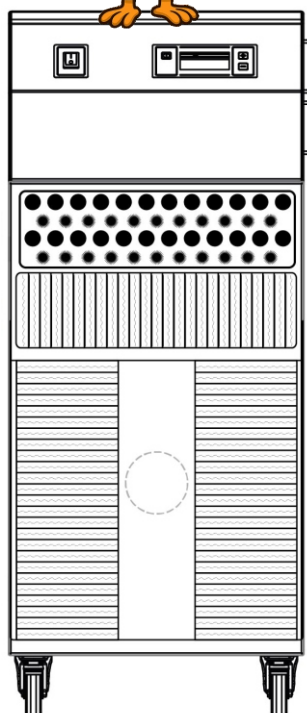

TFS 220 PLUS TECHNICAL DATA

Free Airflow	147	CFM	250	m ³ /hr
Effective Airflow	30-118	CFM	50-200	m ³ /hr
Static Pressure	80.3	in/H ₂ O	20,000	PA
Voltage	100-240	V	NEMA 5-15	Plug
Intake Socket	3.1	inches	80	mm
Outlet Socket	4.9	inches	125	mm
Weight	254	lbs	115	kg
Dimensions (HxWxD)	42x19x22	inches	1050x480x540	mm

TFS 250 PLUS FILTER DATA

Part # 21076	SafeLine (F9)	Included	172.2 ft ² or 16 m ²
Part # 21077	HEPA (H14)	Included	64.6 ft ² or 6 m ²
Part # 21081	Activated Carbon	Included	33 lbs or 30 liters

ACCESSORIES



CONNECTION KITS



SPARK ARRESTORS



HARTING CONNECTIONS



COMMUNICATION CABLE



SIGNAL MODULE



FIG.1



FIG.2



FIG.3



FIG.4

System and Factory-Installed Options	Part #
<i>TFS 220 PLUS (100-240V)</i>	90500
<i>TFS 220 with Spark Extinguisher and Gravity Drop-Out Chamber (Fig. 1)</i>	90500-21235
<i>TFS 220 with Spark Extinguisher (Fig. 2)</i>	90500-21236
<i>TFS 220 with Extraction Arm 75-AL (L=50 inches) (Fig. 3)</i>	90500-21239
<i>TFS 220 with Extraction Arm 75-AL and Spark Extinguisher (Fig. 4)</i>	90500-21241