


# TFS 230 PLUS

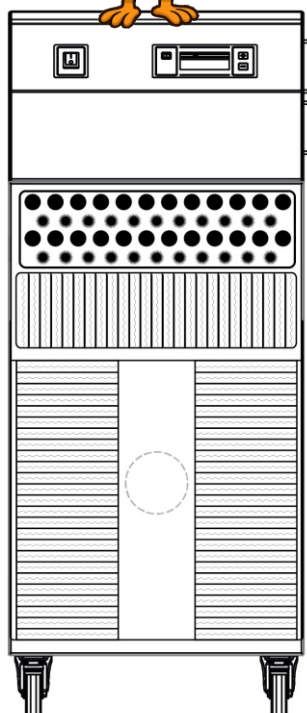

## TFS 230 PLUS TECHNICAL DATA

|                    |          |                     |              |       |
|--------------------|----------|---------------------|--------------|-------|
| Free Airflow       | 206      | CFM                 | 350          | m³/hr |
| Effective Airflow  | 59-176   | CFM                 | 100-300      | m³/hr |
| Static Pressure    | 24.1     | in/H <sub>2</sub> O | 6,000        | PA    |
| Voltage            | 100-240  | V                   | NEMA 5-15    | Plug  |
| Intake Socket      | 3.1      | inches              | 80           | mm    |
| Outlet Socket      | 4.9      | inches              | 125          | mm    |
| Weight             | 254      | lbs                 | 115          | kg    |
| Dimensions (HxWxD) | 42x19x22 | inches              | 1050x480x540 | mm    |

## TFS 250 PLUS FILTER DATA

|              |                  |          |                     |
|--------------|------------------|----------|---------------------|
| Part # 21076 | SafeLine (F9)    | Included | 172.2 ft² or 16 m²  |
| Part # 21077 | HEPA (H14)       | Included | 64.6 ft² or 6 m²    |
| Part # 21081 | Activated Carbon | Included | 33 lbs or 30 liters |

## ACCESSORIES



CONNECTION KITS



SPARK ARRESTORS



HARTING CONNECTIONS



COMMUNICATION CABLE



SIGNAL MODULE



FIG.1



FIG.2



FIG.3



FIG.4

### Factory-Installed Options

*TFS 230 PLUS (100-240V)*

Part #

90499

*TFS 230 with Spark Extinguisher and Gravity Drop-Out Chamber (Fig. 1)*

90499-21235

*TFS 230 with Spark Extinguisher (Fig. 2)*

90499-21236

*TFS 230 with Extraction Arm 75-AL (L=50 inches) (Fig. 3)*

90499-21239

*TFS 230 with Extraction Arm 75-AL and Spark Extinguisher (Fig. 4)*

90499-21241